

Titanium Jaws Chuck 鈦極系列

鈦極
Titanium Jaws

#126 Arbor Type (連柄一體式) Special Heavy duty model 特重型系列

Designed together with arbor structure makes its performance perfect for drilling press and machine center. Precisely machined and ground components ensure the tolerance and accuracy. The clamping three jaws adopt high tech Titanium. The benefit of adopting Titanium is to increase the intensity and wear-resistance.

附有夾頭柄結構之設計，使得它更適於銑床及綜合切削機且有更趨於完美之美現。精密的機械工學和堅固耐用的組成確保了杓力及精度。

夾爪採用高科技的鈦合金鍍膜，可使夾爪更耐磨耐用及確保精度。

→ MT

Description 型號 Code No.	Type 規格	Capacity 夾持力		Male Taper No. DIN or Jacobs 錐柄組接型式	Length (mm) 長度			Weight (g) 重量	Spanner No. 適用勾板手
		mm 公制	inch 英制		A	B	D (mm) 外徑		
1262201	8S	0.3-8	1/64-5/16	MT2	142	61	37	400	12802
1262301	10S	0.3-10	1/64-3/8	MT2	151	70	43	700	12804
1262401	13S	0.3-13	1/64-1/2	MT2	162	81	50	1010	12806
1262402	13S	0.3-13	1/64-1/2	MT3	180	81	50	1140	12806
1262403	13S	0.3-13	1/64-1/2	MT4	206	81	50	1490	12806
1262501	16S	3-16	1/8-5/8	MT3	186	85	57	1445	12808
1262502	16S	3-16	1/8-5/8	MT4	210	85	57	1770	12808

MT:莫氏錐度柄

→ D

Description 型號 Code No.	Type 規格	Capacity 夾持力		Male Taper No. DIN or Jacobs 錐柄組接型式	Length (mm) 長度			Weight (g) 重量	Spanner No. 適用勾板手
		mm 公制	inch 英制		A	B	D (mm) 外徑		
1262001	3S	0.3-3	1/64-1/8	D12	88.5	38.5	24	140	
1262101	6S	0.3-6.5	1/64-1/4	D16	104	54	33	334	12801
1262202	8S	0.3-8	1/64-5/16	D20	121	61	37	510	12802
1262404	13S	0.3-13	1/64-1/2	D20	141	81	50	1030	12806
1262405	13S	0.3-13	1/64-1/2	D25	160	81	50	1190	12806
1262406	13S	0.3-13	1/64-1/2	D32	162	81	50	1405	12806
1262503	16S	3-16	1/8-5/8	D20	145	85	57	1330	12808
1262504	16S	3-16	1/8-5/8	D25	165	85	57	1480	12808
1262505	16S	3-16	1/8-5/8	D32	167	85	57	1700	12808

D:直柄


→ R

Description 型號 Code No.	Type 規格	Capacity 夾持力		Male Taper No. DIN or Jacobs 錐柄組接型式	Length (mm) 長度			Weight (g) 重量	Spanner No. 適用勾板手
		mm 公制	inch 英制		A	B	D (mm) 外徑		
1262407	13S	0.3-13	1/64-1/2	R8	184	81	50	1260	12806
1262506	16S	3-16	1/8-5/8	R8	188	85	58	1530	12808

R:不規則柄

Run Out Inspection Table 同心度檢驗表

Type 規格	§ d 直徑 mm	L 長度 mm	Max Run-Out 最大同心度 mm
3S	2	30	0.05
	3		
6S	4	35	0.05
	6		
8S	4	35	0.05
	6		
10S	8	50	0.05
	6		
13S	10	58	0.05
	6		
16S	10	55	0.05
	13		
16S	6	55	0.05
	10		
16S	16	80	0.05

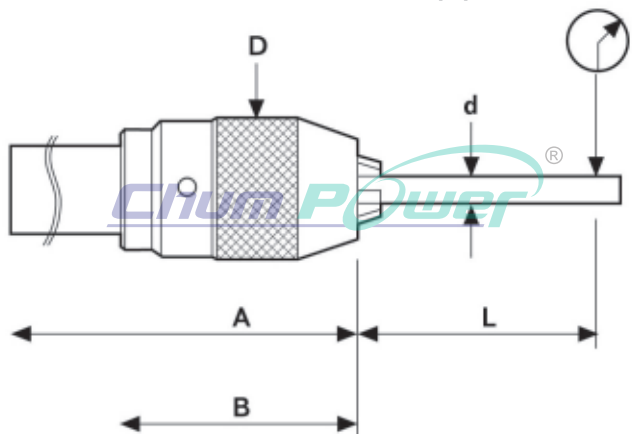

*Custom-Built products are available on request. *特製品可依客戶需求訂製