


MAS 403 PULL STUD TYPE CLAMPING 四瓣爪 MAS 403 PULL STUD TYPE CLAMPING

Design Features :

1. All the above materials are composed of alloy steel.
2. The Gripper is in accordance with the global standard of Pull Stud JIS6339 (MAS403) system.
3. Grippers are developed for integrated and comprise four clamping segments, which is suitable for high and low-speed turning spindles.
4. The surfaces of Grippers are wear-resisting, anticorrosive and special tensile force treatment. The tensile force can bear 1,000 KG force which means 3 million times of lifetime testing circle in our each Grippers. (**ie.BT40)
5. Easy to assemble and suitable for every type of spindles.
6. Our Grippers adopt the rules of BERG, OTT and Röhlm standards.

特點

1. 四瓣爪材料皆以合金鋼製成
2. 此四瓣爪依據拉栓JIS6339(MAS 403)標準製作
3. 一體式分隔爪片設計適用於各種高低轉速之主軸
4. 爪片表面經耐磨耗、防腐蝕之特殊處理，拉力經循環壽命測試機測試可承受1000Kg、300萬次 (**BT40.為例)
5. 採用易拆裝設計，適於各型系列主軸使用
6. 同步採用德國OTT、BERG、及ROHM之說明規範

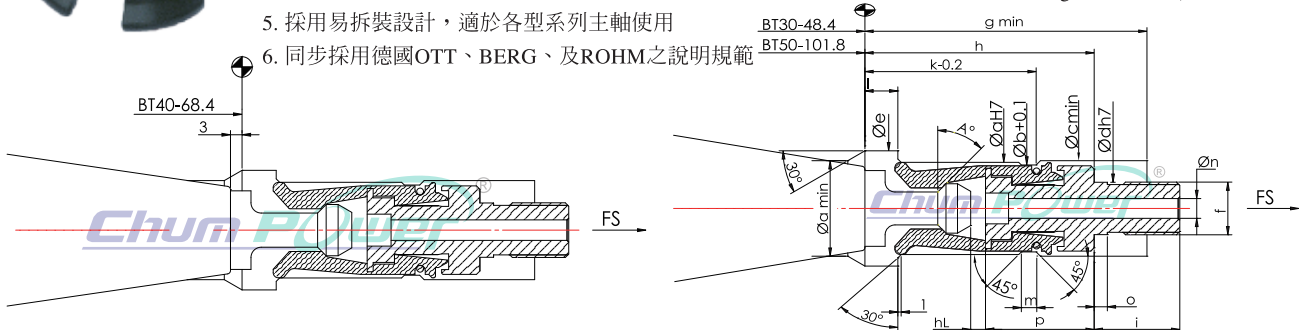

Code No. 型號	Spec. 規格	A°	a	b	c	d	e	g	h	f
90001	BT30-45°	45°	19	17.8	20.2	10	24	50	47	M10*1.5P
90002	BT30-60°	60°								
90014	BT30-90°	90°								
9002098	BT40-45°	45°	28	26.4	28.5	16	35	82	70	M16*1.5P
9002198	BT40-60°	60°								
9002298	BT40-90°	90°								
90023	BT50-45°	45°	43	40.4	43.5	22	54	98	90	M22*1.5P
90024	BT50-60°	60°								
90015	BT50-90°	90°								
90035	BT60-45°	45°	62	58.6	62.5	30	77	130	125	M30*1.5P
90036	BT60-60°	50°								
90037	BT60-90°	90°								

Code No. 型號	Spec. 規格	i	k	l	m	n	o	p	hL	Fs max kN
90001	BT30-45°	20°	37	7.5	3.5	3	3	20.5	3.5	10
90002	BT30-60°									
90014	BT30-90°									
9002098	BT40-45°	26°	52	10	4.5	6	4	33	5	18
9002198	BT40-60°									
9002298	BT40-90°									
90023	BT50-45°	35°	69	16	5	9.5	5	37	5	35
90024	BT50-60°									
90015	BT50-90°									
90035	BT60-45°	40°	96	23	6.5	16	5	49.5	11	70
90036	BT60-60°									
90037	BT60-90°									