


## OTT PULL STUD TYPE CLAMPING 四瓣爪 OTT PULL STUD TYPE CLAMPING

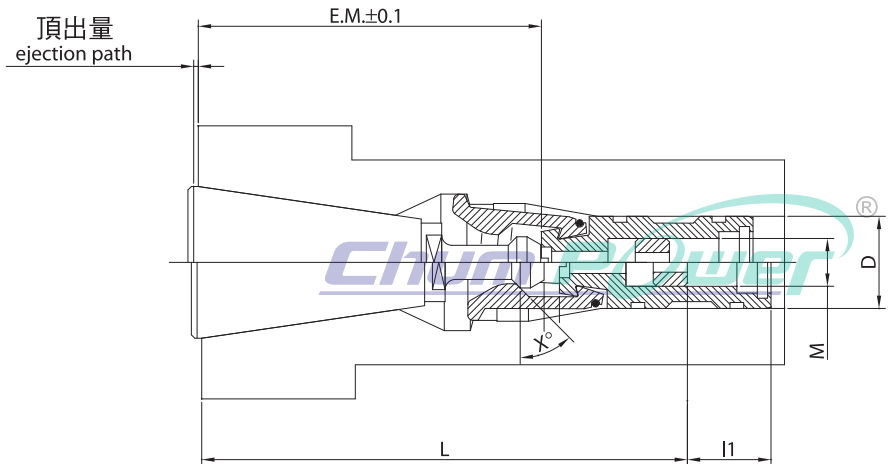

### Design Features :

1. All the above materials are composed of alloy steel.
2. The Gripper is in accordance with the global standard of Pull Stud JIS6339 (MAS403) system.
3. The surfaces of Grippers are wear-resisting, anticorrosive and special tensile force treatment. The tensile force can bear 1,000 KG force which means 3 million times of lifetime testing circle in our each Grippers. (\*\*ie.BT40)
4. Easy to assembly and suitable for every type of spindles.
5. Our Grippers are followed the examples of OTT and Röhms standards.

### 特點

1. 四瓣爪材料皆以合金鋼製成
2. 此四瓣爪依據拉栓JIS6339(MAS 403)標準製作
3. 爪片表面經耐磨耗、防腐蝕之特殊處理，拉力經循環壽命測試機測試可承受1000Kg、300萬次 (\*\*BT40為例)
4. 採用易拆裝設計，適於各型系列主軸使用
5. 同步採用德國OTT 及ROHM之說明規範

### BT

Code No. 型號	Spec. BT X° 規格	D	L	l1	E.M	M	ejection path 頂出量
90051	BT30-45°	19	109	23	70.4	M10x1.25	1
90052	BT30-60°	19	109	23	70.4	M10x1.25	1
90053	BT30-90°	19	109	23	70.4	M10x1.25	1
90054	BT40-45°	27	143	24.5	99.7	M14x1.5	0.65
90055	BT40-60°	27	143	24.5	99.7	M14x1.5	0.65
90056	BT40-90°	27	143	24.5	99.7	M14x1.5	0.65
90057	BT50-45°	40	188.5	31.5	145.75	M16x1.5	1
90058	BT50-60°	40	188.5	31.5	145.75	M16x1.5	1
90059	BT50-90°	40	188.5	31.5	145.75	M16x1.5	1

### CAT

Code No. 型號	Spec. 規格	D	L	l1	E.M	M	ejection path 頂出量
90060	CAT 30	19	109	23	57.7	M10x1.25	1.6
90061	CAT 40	27	143	24.5	82.9	M14x1.5	1.6
90062	CAT 50	40	188.5	31.5	126	M16x1.5	1

### DIN

Code No. 型號	Spec. 規格	D	L	l1	E.M	M	ejection path 頂出量
90063	DIN 30	19	109	23	70.7	M10x1.25	1
90064	DIN 40	27	143	24.5	93.6	M14x1.5	0.65
90065	DIN 50	40	188.5	31.5	134.6	M16x1.5	1