



▶ Quick Change Tap Collets with Overload Clutch

▶ JIS Type

Features:


• Overload Clutch is designed to prevent tap from breaking upon tapping.

▶ 快換式絲攻夾頭-扭力型

▶ JIS

特性:

• 扭力型絲攻設計，可預防絲攻在攻牙時斷裂。

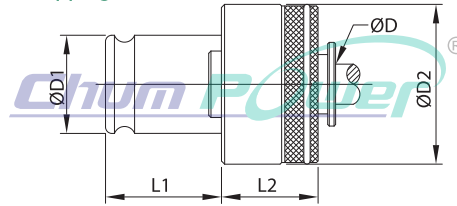

Code NO. 型號	TC312 JIS Tap			Tap Shank 絲攻尺寸 øD柄徑 □四方孔		Capacity 攻牙能力	L1 (mm)	L2 (mm)	øD1 (mm)	øD2 (mm)
35201	M 2			3.0	2.5	M 3~M14	22	25	19	32
35200	M 3		#5, #6	4.0	3.2					
35202	M 4	M4.5	#8	5.0	4.0					
35204	M 5	M5.5	#10	5.5	4.5					
35206	M 6		UNC 1/4	6.0	4.5					
35208			UNC 5/16	6.1	5.0					
35210	M 8	M 7		6.2	5.0					
35212	M10	M 9	UNC 3/8	7.0	5.5					
35213		M11	UNC 7/16	8.0	6.0					
35214	M12			8.5	6.5					
35216			UNC 1/2	9.0	7.0					
35218	M14	M15	UNC 9/16	10.5	8.0					

Code NO. 型號	TC820 JIS Tap			Tap Shank 絲攻尺寸 øD柄徑 □四方孔		Capacity 攻牙能力	L1 (mm)	L2 (mm)	øD1 (mm)	øD2 (mm)
35107	M 5	M5.5	#10	5.5	4.5	M 8~M24	36	30.5	31	50
35105	M 6		UNC 1/4	6.0	4.5					
35101			UNC 5/16	6.1	5.0					
35100	M 8	M 7		6.2	5.0					
35102	M10	M 9	UNC 3/8	7.0	5.5					
35103		M11	UNC 7/16	8.0	6.0					
35104	M12			8.5	6.5					
35106			UNC 1/2	9.0	7.0					
35108	M14	M15	UNC 9/16	10.5	8.0					
35110			UNC 5/8	12.0	9.0					
35112	M16			12.5	10.0					
35113		M17		13.0	10.0					
35114	M18		UNC 3/4	14.0	11.0					
35116	M20			15.0	12.0					
35118	M22		UNC 7/8	17.0	13.0					
35120	M24	M25		19.0	15.0					

Code NO. 型號	TC1433 JIS Tap			Tap Shank 絲攻尺寸 øD柄徑 □四方孔		Capacity 攻牙能力	L1 (mm)	L2 (mm)	øD1 (mm)	øD2 (mm)
35300	M14	M15	UNC 9/16	10.5	8.0	M14~M36	56	45	48	72
35302			UNC 5/8	12.0	9.0					
35304	M16			12.5	10.0					
35306		M17		13.0	10.0					
35308	M18		UNC 3/4	14.0	11.0					
35310	M20			15.0	12.0					
35312	M22		UNC 7/8	17.0	13.0					
35314	M24	M25		19.0	15.0					
35316	M27	M26	UNC 1	20.0	15.0					
35318	M28			21.0	17.0					
35320			UNC 1 1/8	22.0	17.0					
35322	M30			23.0	17.0					
35324	M32		UNC 1 1/4	24.0	19.0					
35326	M33			25.0	19.0					
35328	M35	M34	UNC 1 3/8	26.0	21.0					
35330	M36			28.0	21.0					

*Custom-Built products are available on request. *特製品可依客戶需求訂製